

**XEROX**<sup>®</sup>


Technology | Document Management | Consulting Services

Xerox 4110™ Copier/Printer

Specifications



Reaching  
**New Heights...**  
Delivering Peak  
**Performance**

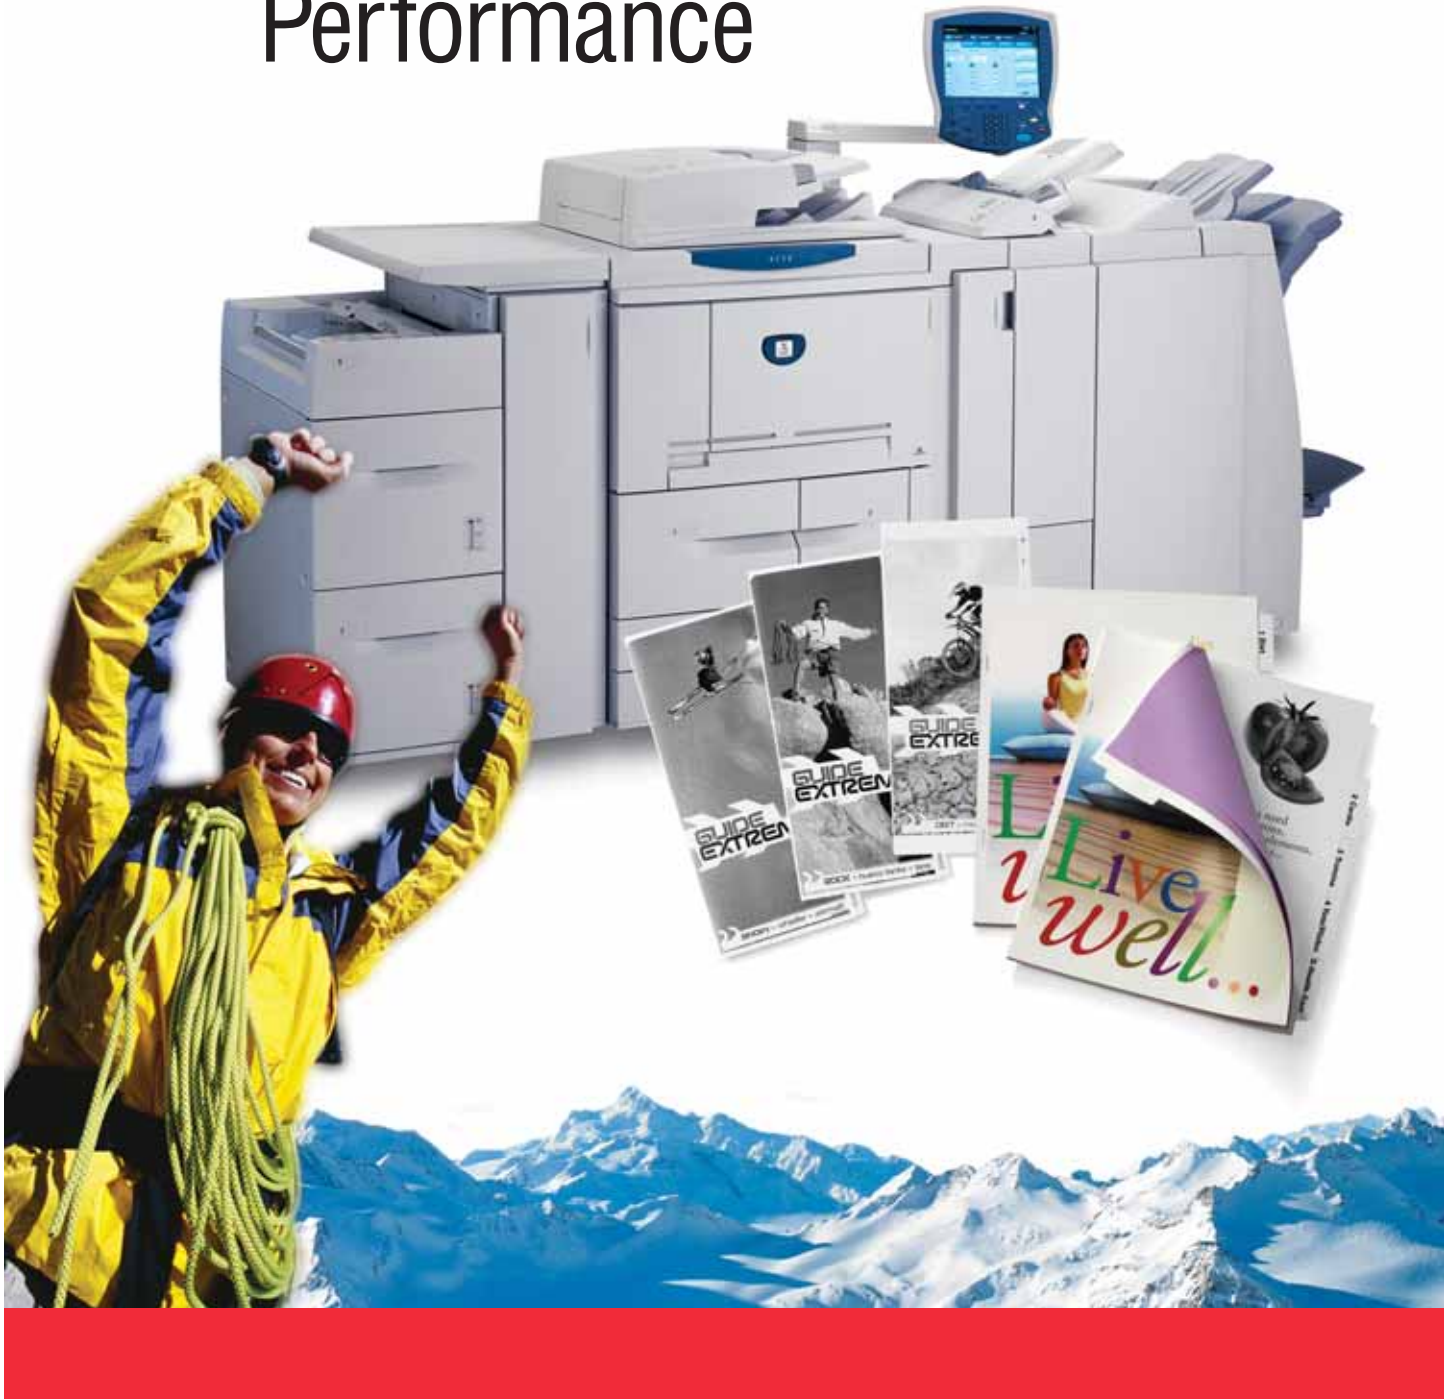



For more information on the Xerox 4110 Copier/Printer, call **1-800 ASK XEROX** or visit us on the Web at: [www.xerox.com](http://www.xerox.com)

## Specifications for the Xerox 4110 Copier/Printer

### Print Engine

- Xerographic Engine
- Print speed up to 110 ppm (8.5" x 11"/A4)
- First Copy Out Time: 3.0 seconds
- Simplex or duplex printing
- Up to 1200 x 1200 dpi RIP resolution and up to 2400 x 2400 dpi print resolution with halftone screen 106 lpi (default) or 150 lpi (high quality mode)

### Document Storage

- 40 GB Hard Drive with 14.6 GB for document storage

### Scanner/Document Handler

- Dual Head Scanner
  - 100 ipm black and white scanning Simplex
  - 100 ipm black and white scanning Duplex
- Optical 600 x 600 dpi 8-bit Gray (256 shades) scan resolution
- Scans in industry standard TIFF, multi-page TIFF or PDF
- Scan to Email with Mail Delivery Notification
- Scan to Network File Server
- 250 sheet Duplex Automatic Document Feeder
- Throughput sizes: 5" x 8" to 11" x 17"/A5 to A3
- Throughput weights:
  - Simplex or Duplex: 16 lb Bond to 110 lb Bond (52 gsm to 200 gsm)
- Optional Color Scan Enablement Kit

### Paper Handling

#### Stock weights and capacity (at 20 lb/80 gsm):

- **Tray 1:** 1,100 sheets (8.5" x 11"/A4); 16 lb Bond to 80 lb Cover (52 gsm to 216 gsm)
- **Tray 2:** 1,600 sheets (8.5" x 11"/A4); 16 lb Bond to 80 lb Cover (52 gsm to 216 gsm)
- **Tray 3-4:** 550 sheets each 5.5" x 7.2" (140mm x 182mm) to 13.0" x 19.2" (330mm x 488mm/A5 to SRA3); 16 lb Bond to 80 lb Cover (52 gsm to 216 gsm)
- **Tray 5 Bypass Tray:** 250 sheets (4" x 6"/102mm x 152mm to 13" x 19.2"/330mm x 488mm); 16 lb Bond to 140 lb Index (52 gsm to 253 gsm)
- **Standard Post Fuse Inserter**  
Inserts pre-printed offset and xerographic color documents in a post fuser manner; 175 sheets (8.5" x 11" to 11" x 17"/A4 to A3); 16 lb Bond to 90 lb Cover (52 gsm to 220 gsm)
- **Optional High Capacity Feeder:** 2 trays, 2,000 sheets each (8.5" x 11"/A4); 16 lb Bond to 80 lb Cover (52 gsm to 216 gsm)
- **Optional Oversize High Capacity Feeder:** 1 Tray; 2,000 sheets (8" x 10"/B5 to 13" x 19"/SRA3); 18 lb to 110 lb (64 gsm to 253 gsm) enables use of approved coated stocks\*

### Standard Finisher

- 3 position single or dual 100 sheet variable length stapling

- 2 and 3 hole punch North America; 2 and 4 hole punch Europe and South America
- Built in bi-directional de-curler
- Output capacity of 3,000 sheets (20 lb/80 gsm)

### Optional Booklet Maker Finisher

#### Includes features of the Standard Finisher plus:

- Automatically creates booklets of up to 15 pages (60 imaged sides with saddle stitching)
- Creates booklets from 11" x 17"/A3, 8.5" x 14" and 8.5" x 11"/A4
- Output capacity of 2,000 sheets (20 lb/80 gsm)

### Optional Folder

- C-fold and Z-fold of 8.5" x 11"/A4
- Print on inside or outside of folded paper
- Folds 11" x 17"/A3 Z-fold for insertion into letter/A4 document sets

### Data Security

- Secure Print
- Image Overwrite up to 3 times (optional)
- Data Encryption (SSL/TLS) (optional)

### Electrical Requirements

- Print Engine:
  - 208-240 VAC, 60/50 Hz, 15/13 amp service
  - KVA Rating: Max Power Consumption: 2.8-3.1 KVA
  - Agency certification: Energy Star®, CSA, Europe: CE, NEMKO, WEEE compliance

\* Refer to the Customer Expectation Setting Document for approved coated stocks.

Integrated Copy/Print Controller	Xerox FreeFlow® DocuSP® Print Controller	Optional EFI Fiery Print Controller
<b>Hardware Specifications</b> <ul style="list-style-type: none"> <li>• 40 GB Hard disk drive, 512 MB RAM</li> <li>• 10.4" color, touch screen flat panel display</li> <li>• Ethernet interface (10 MBTX/sec or 100 MBTX/sec)</li> </ul> <b>Client Environments Supported</b> <ul style="list-style-type: none"> <li>• Windows 98/ME/2000/XP and NT 4.0</li> <li>• Macintosh® OS 8.0x/8.5x/9.0x/10.1/10.2/10.3</li> </ul> <b>PDLs and Data Formats</b> <ul style="list-style-type: none"> <li>• Adobe® PostScript® Level 3</li> <li>• PDF</li> <li>• PCL 5e and 6</li> <li>• TIFF</li> <li>• HPGL, HPGL2</li> </ul> <b>Connectivity</b> <b>Native network environments</b> <ul style="list-style-type: none"> <li>• TCP/IP, SNMP, SMB, Novell® IPX, AppleTalk®, IPP</li> </ul>	<b>Hardware Specifications</b> <ul style="list-style-type: none"> <li>• SUN® Ultra 20 platform</li> <li>• 1 GB memory</li> <li>• 80 GB Hard Disk drive</li> <li>• DVD Writer/CD Writer</li> <li>• Color flat-panel monitor, keyboard and mouse</li> </ul> <b>Client Environments Supported</b> <ul style="list-style-type: none"> <li>• Windows® 2000 SP4/XP SP2/Server 2003</li> <li>• Macintosh® OS X (10.3 or later)</li> </ul> <b>Options</b> <ul style="list-style-type: none"> <li>• DocuSP® stand</li> <li>• VI Interpreter (VIPP® software)</li> <li>• Imposition License</li> <li>• LCDS enablement</li> <li>• IPDS enablement</li> <li>• Online CUP Kit (Channel-to-Universal PCI for online channel connectivity)</li> <li>• Removable Hard Disk Drive</li> </ul> <b>Connectivity</b> <b>Native network environments</b> <ul style="list-style-type: none"> <li>• TCP/IP, SNMP, Novell® IPX, AppleTalk®, IPP</li> </ul>	<b>Hardware Specifications</b> <ul style="list-style-type: none"> <li>• Memory: 1 GB</li> <li>• CPU: 2.8 GHz, Celeron® D</li> <li>• Hard disk: 2 x 80 GB SATA drive</li> <li>• DVD/CD-RW drive</li> </ul> <b>Client Environments Supported</b> <ul style="list-style-type: none"> <li>• Windows® XP SP4, 2000 SP2, 2003 Server</li> <li>• Macintosh OS 10.2.x or later</li> <li>• Sun™ Unix</li> <li>• SGI Unix</li> </ul> <b>Web Browser Support</b> <ul style="list-style-type: none"> <li>• Microsoft® Internet Explorer (Version 6.0 SPI, for Windows only)</li> <li>• Apple® Safari™ (Version 1.2.x for Mac® OS X only)</li> </ul> <b>Fiery Optional hardware/software</b> <ul style="list-style-type: none"> <li>• Production Printing Package</li> <li>• Fiery Impose Package</li> <li>• FACI Kit (flat panel monitor, keyboard, mouse)</li> <li>• FACI Furniture</li> <li>• EFI FreeForm 1 &amp; 2</li> <li>• FreeFlow® VI Interpreter (formerly VIPP)</li> </ul>



©2008 XEROX Corporation. All rights reserved. XEROX®, DocuSP®, FreeFlow®, VIPP®, and 4110® are trademarks of Xerox Corporation in the U.S. and/or other countries. Product appearance, build status and/or specifications are subject to change without notice. The Xerox Total Satisfaction Guarantee applies to equipment under a Xerox warranty or a Full Service Maintenance Agreement and is subject to certain conditions. EFI®, Fiery®, and Command Workstation™ are registered trademarks of Electronics for Imaging, Inc. Adobe® and PostScript™ are registered trademarks of Adobe Systems, Inc., Apple® and Safari™ are registered trademarks of Apple Computer, Inc., Windows® is a registered trademark of Microsoft Corporation, Sun™ is a registered trademark of Sun Microsystems, Inc., SPARC is a registered trademark of SPARC International, Inc. in the U.S. and/or other countries. ENERGY STAR® and the ENERGY STAR mark are registered U.S. marks. As an ENERGY STAR partner, Xerox Corporation has determined that this product meets the ENERGY STAR guidelines for energy efficiency. 02/08.